QUANTUM® GOLD, QUANTUM® SILVER COMMERCIAL WASHER-EXTRACTOR SCT030

Built for Reliable Performance

Speed Queen® machines are built specifically for the commercial environment. We use steel where others use plastic. Our world-class test lab rigorously pushes our products far beyond the conditions they'll face in the field. We believe in being there when our customers need us most. And we go the extra mile at every point of the manufacturing process to ensure that our machines reflect that belief. With Quantum® controls it's easy to customize your laundry operation to meet your needs. This revolutionary technology unites equipment controls, programming and revenue management into one versatile system.

- Advanced inverter drive provides smooth, reliable power saving you 33% on electricity versus previous models
- Faster extraction speed on Quantum[™] Gold machines have up to 200 G-Force extraction to remove more water, leading to shorter dry times
- Leak detection saves water by detecting slow or leaking fill-valves and drains
- Stronger frame design lasts longer, balances loads more efficiently and is pallet jackable, making it easier to install
- Quiet performance reducing sound and vibration levels
- Four compartment dispenser
- Automatic door lock
- Secure high-capacity coin vault
- Commercial grade bearings, shaft and seal
- Ergonomic door handle
- Front service access
- Available with pump drain option



Quantum[®] Gold



Quantum[®] Silver

Cutting edge Quantum[®] control system from Speed Queen[®] gives you the freedom to manage laundry your way and the power to achieve unmatched levels of revenue. This revolutionary technology provides users with more cycle choices than ever, offers unprecedented options to help lower operating costs and incorporates tools and options to increase revenue.






SPECIFICATIONS

COMMERCIAL WASHER-EXTRACTOR

CONTROL OPTION Gold, Silver COLOR Stainless Steel CAPACITY - Ib (kg) 30 (13.6) CYLINDER DIAMETER - in (mm) 24 (610) CYLINDER DEPTH - in (mm) 16 (406) CYLINDER VOLUME - cu. ft. (liters) 4.2 (119) DOOR OPENING SIZE - in (mm) 14.3 (363) WATER INLET CONNECTION - in (mm) 2 x 0.75 (19) DRAIN DIAMETER - in (mm) 1 x 3 (76) DRAIN HEIGHT TO FLOOR - in (mm) 4.3 (109) MOTOR POWER CONSUMPTION - HP (kW) 1 (0.75) TOTAL NUMBER OF SPEEDS 6, 9 CYLINDER SPEEDS Gentle RPM (G-Force) Wash Wash 48 (0.8) Distribution 86 (2.5) Very Low 282 (27) Low 485 (80) Medium 542 (100) ***High 606 (125) **Very High 664 (150) ***Ultra High 766 (200) **** Y 220-240/50-60/1/3 Voltage X 220-240/50-60/3 Wires/ X 25	MODEL	SCT030			
CAPACITY - Ib (kg) 30 (13.6) CYLINDER DIAMETER - in (mm) 24 (610) CYLINDER DEPTH - in (mm) 16 (406) CYLINDER VOLUME - cu. ft. (liters) 4.2 (119) DOOR OPENING SIZE - in (mm) 14.3 (363) WATER INLET CONNECTION - in (mm) 2 x 0.75 (19) DRAIN DIAMETER - in (mm) 1 x 3 (76) DRAIN DIAMETER - in (mm) 4.3 (109) MOTOR POWER CONSUMPTION - HP (kW) 1(0.75) TOTAL NUMBER OF SPEEDS 6, 9 CYLINDER SPEEDS Gentle A4 (0.4) RPM (G-Force) Wash 48 (0.8) Distribution 86 (2.5) Very Low 282 (27) Low 485 (80) Medium 542 (100) ***High 606 (125) **Very High 664 (150) ***Utra High 766 (200) *** 8 120/60/1 Voltage X 220-240/50-60/1/3 Virtage X 220-240/50-60/3 FEA Y 220-240/60/1/3 FPOROX - in (mm)	CONTROL	Gold, Silver			
CYLINDER DIAMETER - in (mm) 24 (610) CYLINDER DEPTH - in (mm) 16 (406) CYLINDER VOLUME - cu. ft. (liters) 4.2 (119) DOOR OPENING SIZE - in (mm) 14.3 (363) WATER INLET CONNECTION - in (mm) 2 x 0.75 (19) DRAIN DIAMETER - in (mm) 1 x 3 (76) DRAIN DIAMETER - in (mm) 1 x 3 (76) DRAIN HEIGHT TO FLOOR - in (mm) 4.3 (109) MOTOR POWER CONSUMPTION - HP (kW) 1 (0.75) TOTAL NUMBER OF SPEEDS 6, 9 CYLINDER SPEEDS Gentle A4 (0.4) RPM (G-Force) Wash 48 (0.8) Distribution 86 (2.5) Very Low 282 (27) Low 485 (80) Medium 542 (100) **High 606 (125) **Very High 664 (150) **** B 120/60/1 Voltage X 200-240/50-60/1/3 Vires/ X 200-240/50-60/1/3 Circuit Ts-4 (3 Ph) 15-4 (3 Ph) Breaker - FLA Y 220-240/60/1/3	COLOR	Stainless Steel			
CYLINDER DEPTH - in (mm) 16 (406) CYLINDER VOLUME - cu. ft. (liters) 4.2 (119) DOOR OPENING SIZE - in (mm) 14.3 (363) WATER INLET CONNECTION - in (mm) 2 x 0.75 (19) DRAIN DIAMETER - in (mm) 1 x 3 (76) DRAIN HEIGHT TO FLOOR - in (mm) 4.3 (109) MOTOR POWER CONSUMPTION - HP (kW) 1 (0.75) TOTAL NUMBER OF SPEEDS 6, 9 CYLINDER SPEEDS Gentle A 8 (0.8) Distribution RPM (G-Force) Wash Wash 48 (0.8) Distribution 86 (2.5) Very Low 282 (27) Low 485 (80) Medium 542 (100) **High 606 (125) **Very High 664 (150) ***Uttra High 766 (200) **** B 120/60/1 Voltage X 200-240/50-60/1/3 Voltage X 220-240/60/1/3 Voltage X 220-240/60/1/3 Voltage X 220-240/60/1/3 N 4	CAPACITY -	30 (13.6)			
CYLINDER VOLUME - cu. ft. (liters) 4.2 (119) DOOR OPENING SIZE - in (mm) 14.3 (363) WATER INLET CONNECTION - in (mm) 2 x 0.75 (19) DRAIN DIAMETER - in (mm) 1 x 3 (76) DRAIN HEIGHT TO FLOOR - in (mm) 4.3 (109) MOTOR POWER CONSUMPTION - HP (kW) 1 (0.75) TOTAL NUMBER OF SPEEDS 6.9 CYLINDER SPEEDS Gentle RPM (G-Force) Wash Very Low 282 (27) Low 485 (80) Medium 542 (100) ***High 606 (125) **Very High 664 (150) ***Ultra High 766 (200) **** B 120/60/1 Voltage X 200-240/50-60/1/3 Voltage X 220-240/60/1/3 Viers/ Circuit X 220-240/60/1/3 Breaker - FLA Y 220-240/60/1/3 N 440-480/50-60/3 15-3 SHIPPING N 440-480/50-60/3 DIMENSIONS APPROX in (mm) Depth 38.3 (973) APROX.	CYLINDER D	24 (610)			
DOOR OPENING SIZE - in (mm) 14.3 (363) WATER INLET CONNECTION - in (mm) 2 x 0.75 (19) DRAIN DIAMETER - in (mm) 1 x 3 (76) DRAIN HEIGHT TO FLOOR - in (mm) 4.3 (109) MOTOR POWER CONSUMPTION - HP (kW) 1 (0.75) TOTAL NUMBER OF SPEEDS 6, 9 CYLINDER SPEEDS Gentle A4 (0.4) RPM (G-Force) Wash 48 (0.8) Distribution 86 (2.5) Very Low 282 (27) Low 485 (80) Medium 542 (100) **High 606 (125) **Very High 664 (150) **Utra High 766 (200) *** B 120/60/1 Voltage X 200-240/50-60/1/3 Vires/ X 220-240/60/1/3 I5-7 (1 Ph) 15-4 (3 Ph) Y 220-240/60/1/3 15-7 (1 Ph) Breaker - Y 220-240/60/1/3 15-7 (1 Ph) FLA Y 220-240/60/1/3 15-7 (1 Ph) SHIPPING Nidth 3	CYLINDER D	16 (406)			
WATER INLET CONNECTION - in (mm) 2 x 0.75 (19) DRAIN DIAMETER - in (mm) 1 x 3 (76) DRAIN HEIGHT TO FLOOR - in (mm) 4.3 (109) MOTOR POWER CONSUMPTION - HP (kW) 1 (0.75) TOTAL NUMBER OF SPEEDS 6,9 CYLINDER SPEEDS Gentle RPM (G-Force) Wash Very Low 282 (27) Low 485 (80) Medium 542 (100) ***High 606 (125) **Very High 664 (150) ***Ultra High 766 (200) ***Ultra High 766 (200) ***Ultra High 766 (200) **** B 120/60/1 Voltage X 220-240/50-60/13 Wires/ X 220-240/60/13 Circuit Y 220-240/60/13 Breaker - FLA Y 220-240/60/13 FLA Y 220-240/60/13 N 440-480/50-60/3 15-3 SHIPPING Width 31.5 (800) DIMENSIONS Depth 38.3 (973) <	CYLINDER V	4.2 (119)			
DRAIN DIAMETER - in (mm) 1 x 3 (76) DRAIN HEIGHT TO FLOOR - in (mm) 4.3 (109) MOTOR POWER CONSUMPTION - HP (kW) 1 (0.75) TOTAL NUMBER OF SPEEDS 6, 9 CYLINDER SPEEDS Gentle A8 (0.8) Distribution B Distribution Voltage Very Low Wires/ X Voltage X SHIPPING Width N 440-480/50-60/3 APPROX in (mm) Depth AB 13.03)	DOOR OPE	14.3 (363)			
DRAIN HEIGHT TO FLOOR - in (mm) 4.3 (109) MOTOR POWER CONSUMPTION - HP (kW) 1 (0.75) TOTAL NUMBER OF SPEEDS 6, 9 CYLINDER SPEEDS Gentle 34 (0.4) RPM (G-Force) Wash 48 (0.8) Distribution 86 (2.5) Very Low Very Low 282 (27) Low Low 485 (80) Medium 542 (100) **High 606 (125) **Very High 664 (150) **Ultra High 766 (200) **Ultra High 766 (200) *** B 120/60/1 15-12 Voltage X 200-240/50-60/1/3 15-7 (1 Ph) Breaker - FLA Y 220-240/60/1/3 15-7 (1 Ph) Breaker - FLA Y 220-240/60/1/3 15-7 (1 Ph) SHIPPING N 440-480/50-60/3 15-3 SHIPPING Nidth 31.5 (800) 15-4 (3 Ph) MEIGHT - Ib (kg) 440 (200) 38.3 (973) SHIPPING WEIGHT - Ib (kg) 440 (200) 38.1 (303)	WATER INLE	2 x 0.75 (19)			
MOTOR POWER CONSUMPTION - HP (kW) 1 (0.75) TOTAL NUMBER OF SPEEDS 6, 9 CYLINDER SPEEDS Gentle 34 (0.4) RPM (G-Force) Wash 48 (0.8) Distribution 86 (2.5) Very Low Low 485 (80) 485 (80) Medium 542 (100) **High 606 (125) **Very High 664 (150) ***Ultra High 766 (200) **Ultra High Voltage X 200-240/50-60/13 15-7 (1 Ph) Breaker - Y 220-240/60/13 15-7 (1 Ph) FLA Y 220-240/60/13 15-7 (1 Ph) Breaker - Y 220-240/60/13 15-7 (1 Ph) FLA Y 220-240/60/13 15-7 (1 Ph) Breaker - Y 220-240/60/13 15-7 (1 Ph) SHIPPING N 440-480/50-60/3 15-3 SHIPPING Width 31.5 (800) 15/3 APPROX in (mm) Depth 38.3 (973) 15/3 SHIPPING WEIGHT - Ib (kg) 440	DRAIN DIAM	1 x 3 (76)			
TOTAL NUMBER OF SPEEDS 6, 9 CYLINDER SPEEDS RPM (G-Force) Gentle 34 (0.4) Wash 48 (0.8) Distribution Distribution 86 (2.5) Very Low Very Low 282 (27) Low Low 485 (80) Medium 542 (100) **High 606 (125) **Very High 664 (150) **Very High 664 (150) **Ultra High 766 (200) *** B 120/60/1 Voltage Wires/ Circuit X 200-240/50-60/1/3 15-7 (1 Ph) Breaker - FLA Y 220-240/60/13 15-7 (1 Ph) N 440-480/50-60/3 15-3 SHIPPING DIMENSIONS APPROX in (mm) Width 31.5 (800) DIMENSIONS APPROX in (mm) Depth 38.3 (973) Height 51.3 (1303) 15-13 (1303)	DRAIN HEIG	4.3 (109)			
CYLINDER SPEEDS RPM (G-Force) Gentle 34 (0.4) Quart Wash 48 (0.8) Distribution 86 (2.5) Very Low Very Low 282 (27) Low Low 485 (80) 485 (80) Medium 542 (100) **High 606 (125) **Very High 664 (150) **Ultra High 766 (200) **Ultra High Voltage X 200-240/50-60/13 15-7 (1 Ph) Breaker - FLA Y 220-240/60/13 15-7 (1 Ph) Breaker - FLA Y 220-240/60/13 15-7 (1 Ph) SHIPPING N 440-480/50-60/3 15-3 SHIPPING Wireth 31.5 (800) 154 (3 Ph) DIMENSIONS APPROX in (mm) Depth 38.3 (973) 15-3 NET WEIGHT - Ib (kg) 440 (200) 5HIPPING WEIGHT - Ib (kg) 480 (218)	MOTOR PO	1(0.75)			
RPM (G-Force) Wash 48 (0.8) Value 48 (0.8) 86 (2.5) Distribution 86 (2.5) Very Low Very Low 282 (27) Low Low 485 (80) 48 (0.8) Medium 542 (100) **High 606 (125) **Very High 664 (150) ***Ultra High 766 (200) **Ultra High Voltage X 200-240/50-60/1/3 15-7 (1 Ph) Breaker - Y 220-240/60/1/3 15-7 (1 Ph) FLA Y 220-240/60/1/3 15-7 (1 Ph) Breaker - Y 220-240/60/1/3 15-7 (1 Ph) FLA Y 220-240/60/1/3 15-7 (1 Ph) Breaker - Y 220-240/60/1/3 15-7 (1 Ph) FLA N 440-480/50-60/3 15-3 SHIPPING N 440-480/50-60/3 15-3 DIMENSIONS Depth 38.3 (973) APPROX in (mm) Height 51.3 (1303) NET WEIGHT - Ib (kg) 440 (200)	TOTAL NUM	6,9			
Wash 48 (0.8) Distribution 86 (2.5) Very Low 282 (27) Low 485 (80) Medium 542 (100) **High 606 (125) **Very High 664 (150) **Ultra High 766 (200) ***Ultra High 766 (200) *** 8 120/60/1 Voltage X 220-240/50-60/1/3 15-7 (1 Ph) Vicrouit X 220-240/60/1/3 15-7 (1 Ph) Breaker - FLA Y 220-240/60/1/3 15-7 (1 Ph) FLA N 440-480/50-60/3 15-3 SHIPPING N 440-480/50-60/3 15-3 NET WEIGHT - Ib (kg) 480 (218) 480 (218)		34 (0.4)			
Very Low 282 (27) Low 485 (80) Medium 542 (100) **High 606 (125) **Very High 664 (150) **Ultra High 766 (200) *** B 120/60/1 Voltage X 200-240/50-60/1/3 Vires/ X 220-240/60/1/3 Straker - Y 220-240/60/1/3 FLA Y 220-240/50-60/1/3 SHIPPING N 440-480/50-60/3 DIMENSIONS Depth 38.3 (973) APPROX in (mm) Depth 38.3 (973) Height 51.3 (1303) Height SHIPPING WEIGHT - Ib (kg) 480 (218)	RPM (G-For	48 (0.8)			
Low 485 (80) Medium 542 (100) **High 606 (125) **Very High 664 (150) **Ultra High 766 (200) **Ultra High 766 (200) **Ult		86 (2.5)			
Medium 542 (100) **High 606 (125) **Very High 664 (150) **Ultra High 766 (200) **Ultra High 766 (200) **Voltage X Voltage X Voltage Y Breaker - FLA Y PLA X SHIPPING N A440-480/50-60/3 15-3 DIMENSIONS Depth APPROX in (mm) Depth Height 51.3 (1303) NET WEIGHT - Ib (kg) 480 (218)		282 (27)			
***High 606 (125) **Very High 664 (150) **Ultra High 766 (200) **Ultra High 15-12 Voltage X 200-240/50-60/1/3 Wires/ Circuit X 220-240/60/1/3 Breaker - FLA Y 220-240/60/1/3 N 440-480/50-60/3 15-7 (1 Ph) SHIPPING N 440-480/50-60/3 SHIPPING J15 (800) 38.3 (973) DIMENSIONS Depth 38.3 (973) APPROX in (mm) Height 51.3 (1303) NET WEIGHT - Ib (kg) 480 (218)		485 (80)			
Very High 664 (150) **Ultra High 766 (200) * Ultra High 766 (200) Voltage X 220-240/50-60/1/3 Wires/ X 220-240/50-60/1/3 Circuit Y 220-240/60/1/3 Breaker - FLA Y 220-240/60/1/3 N 440-480/50-60/3 15-7 (1 Ph) SHIPPING N 440-480/50-60/3 DIMENSIONS Depth 31.5 (800) APPROX in (mm) Depth 38.3 (973) Height 51.3 (1303) 15-13 (1303) NET WEIGHT - Ib (kg) 440 (200) 480 (218)		542 (100)			
Ultra High 766 (200) * B 120/60/1 15-12 Voltage Wires/ Circuit Breaker - FLA X 200-240/50-60/1/3 15-7 (1 Ph) 15-4 (3 Ph) Y 220-240/60/1/3 (Pump Drain Only) 15-7 (1 Ph) 15-4 (3 Ph) N 440-480/50-60/3 15-3 SHIPPING DIMENSIONS APPROX in (mm) Width 31.5 (800) Height 51.3 (1303) Height NET WEIGHT - Ib (kg) 440 (200) SHIPPING WEIGHT - Ib (kg) 480 (218)		606 (125)			
*** B 120/60/1 15-12 Voltage Wires/ Circuit Breaker - FLA X 200-240/50-60/1/3 15-7 (1 Ph) 15-4 (3 Ph) Y 220-240/60/1/3 (Pump Drain Only) 15-7 (1 Ph) 15-4 (3 Ph) N 440-480/50-60/3 15-3 SHIPPING DIMENSIONS APPROX in (mm) Width 31.5 (800) Height 51.3 (1303) NET WEIGHT - Ib (kg) 440 (200) SHIPPING WEIGHT - Ib (kg) 480 (218) 480 (218)		664 (150)			
Voltage Wires/ Circuit X 200-240/50-60/1/3 15-7 (1 Ph) 15-4 (3 Ph) Breaker - FLA Y 220-240/60/1/3 15-7 (1 Ph) 15-4 (3 Ph) N 440-480/50-60/3 15-3 SHIPPING DIMENSIONS APPROX in (mm) Width 31.5 (800) Height 51.3 (1303) 15-3 NET WEIGHT - Ib (kg) 440 (200) 480 (218)		766 (200)			
Wires/ Circuit X 200-240/50-60/1/3 15-7 (1 Ph) 15-4 (3 Ph) Breaker - FLA Y 220-240/60/1/3 15-7 (1 Ph) 15-4 (3 Ph) N 440-480/50-60/3 15-3 SHIPPING Width 31.5 (800) DIMENSIONS APPROX in (mm) Depth 38.3 (973) Height 51.3 (1303) NET WEIGHT - Ib (kg) 440 (200) SHIPPING WEIGHT - Ib (kg) 480 (218)		В	120/60/1	15-12	
FLA Y If the transmission of the prime prain Only) 15-4 (3 Ph) N 440-480/50-60/3 15-3 SHIPPING Width 31.5 (800) DIMENSIONS APPROX in (mm) Depth 38.3 (973) Height 51.3 (1303) NET WEIGHT - Ib (kg) 440 (200) SHIPPING WEIGHT - Ib (kg) 480 (218)	Wires/	Х	200-240/50-60/1/3		
SHIPPING Width 31.5 (800) DIMENSIONS Depth 38.3 (973) APPROX in (mm) Height 51.3 (1303) NET WEIGHT - Ib (kg) 440 (200) SHIPPING WEIGHT - Ib (kg) 480 (218)		Y			
DIMENSIONS APPROX in (mm) Depth 38.3 (973) Height 51.3 (1303) NET WEIGHT - Ib (kg) 440 (200) SHIPPING WEIGHT - Ib (kg) 480 (218)		Ν	440-480/50-60/3	15-3	
APPROX in (mm) Depth 38.3 (973) Height 51.3 (1303) NET WEIGHT - Ib (kg) 440 (200) SHIPPING WEIGHT - Ib (kg) 480 (218)				31.5 (800)	
NET WEIGHT - Ib (kg) 440 (200) SHIPPING WEIGHT - Ib (kg) 480 (218)	Dopth			38.3 (973)	
SHIPPING WEIGHT - Ib (kg) 480 (218)		Height			
	NET WEIGH	440 (200)			
	SHIPPING W	480 (218)			
****AGENCY APPROVALS cUL _{us}	****AGENC	cULus			

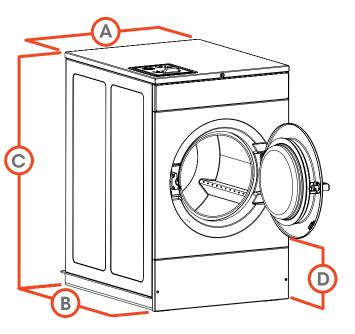

Α.	OVERALL WIDTH - in (mm)	29 (737)
В.	*OVERALL DEPTH - in (mm)	35.3 (897)
C.	OVERALL HEIGHT - in (mm)	45 (1143)
D.	FLOOR TO DOOR OPENING - in (mm)	14 (356)

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

- * Overall depth includes vacuum breaker to door handle.
- ** High, Very High, and Ultra High Spin Speeds are available on the Quantum Gold models only.
- *** Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines.

**** Agency approvals may vary depending on configuration. Consult factory for details.



by Alliance Laundry Systems