SPEED QUEEN MULTI-HOUSING

QUANTUM® PLATINUM COIN DROP INSTALLED, PREP FOR COIN, PREP FOR CARD

COMMERCIAL FRONT CONTROL FRONT LOAD WASHER - STAINLESS

Built for Reliable Performance

Engineered and built like no other, the Speed Queen front load washer is designed to be everything people thought a washer couldn't be, beginning with its revolutionary suspension and sensing technology. This groundbreaking innovation manages and redistributes out-of-balance loads to deliver uninterrupted cycles, virtually eliminate vibration and operate so quietly neighboring residents won't even know it's running. It also touts an incredible 440 G-Force extraction speed to maximize moisture removal, reduce dry times and minimize utility costs. And as if that's not game-changing enough, this smooth-running, laundry-optimizing machine delivers increased water efficiency. It's everything you never knew it could be. Front controlled products have met every design standard to be 100% ADA compliant.

- Graphical display screen with animated instructions
- Premium cycle upgrade prompts
- Revolutionary balancing technology
- Industry leading 1200 RPM spin speed exerts 440 G-force extraction
- Integrated meter case
- Extra-wide 15.5" door opening and 180° door swing
- Rugged suspension system
- · Large capacity meter case standard
- · Durable stainless steel tub standard
- · Four-compartment soap dispenser
- Wash Alert[™] capability







Quantum® Platinum Controls offer residents unparalleled flexibility. The full-color, multi-language display makes operation intuitive, Your residents have the ability to tailor wash cycles to their specific needs with a special "Speed Cycle" and other premium cycle upgrades. Management is simplified with advanced analytics and on-screen diagnostics to alert your laundry service provider to potential problems, minimizing downtime.




SPECIFICATIONS

COMMERCIAL FRONT CONTROL FRONT LOAD WASHER - STAINLESS

MODEL - see below for all models and activation available		
CONTROL OPTION		Quantum Platinum
COLOR		Stainless
CAPACITY - lb (kg)		21.5 (9.5)
OVERALL WIDTH - in (mm)		26.875 (683)
OVERALL DEPTH - in (mm)		27.73 (704)
OVERALL HEIGHT - in (mm)	44.34 (1126)	
CYLINDER VOLUME - cu. ft. (liters)	3.42 (96.8)	
SPIN SPEED G-FORCE (RPM)		440 (1200)
MOTOR SIZE - HP (kw)		0.9 (0.67)
WATER CONSUMPTION PER CYCLE -	g (liter)	13.68 (51.8)
IWF (WATER FACTOR) - gal/ft³ (liters/liter/cycle)		4.0 (0.53)
MEF _{J2} (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)		2.20 (62.3)
AVAILABLE WATER TEMPERATURES		Hot, Warm, Cold
AVAILABLE CYCLES		Delicate, Perm Press, Normal, Heavy Soil, Medium Soil, Light Soil, Speed Cycle
ELECTRICAL REQUIREMENTS (v/Hz/P	h-Amp)	120/60/1 - 15 Amp
WATER PRESSURE - p.s.i. (bar)		20-120 (1.4/8.3)
CYLINDER FINISH		Stainless Steel
NET WEIGHT - Ib (kg)		260 (118)
SHIPPING WEIGHT - lb (kg)		270 (122.5)
	Width	34 (864)
SHIPPING DIMENSIONS APPROX in (mm)	Depth	30 (762)
- " " (,	Height	44.5 (1130)
AGENCY APPROVALS		cULus

MODELS	DRAIN	ACTIVATION	
SFNDCASP115TN01	Pump		(Par)
SFNDCASG115TN01	Oit	Coin Drop Installed	Ţ
SFNYCASG115TN01*	Gravity		
SFNDXAJP115TN01	Pump	Prep for Coin	11
SFNDYASP115TN01	Pump	Prep for	INSERT CAND HERE
SFNDYAJP115TN01+	Tump	Card	
+ Supply Injection			

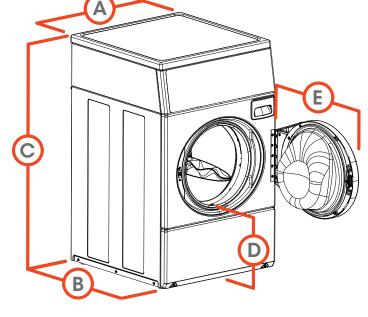

Α.	OVERALL WIDTH - in (mm)	26.875 (683)
B.	OVERALL DEPTH - in (mm)	27.73 (704)
C.	OVERALL HEIGHT - in (mm)	44.34 (1126)
D.	FLOOR TO DOOR OPENING -in (mm)	14.6 (371)*
E.	DOOR SWING - in (mm)	24 (610)

^{*} For ADA compliance turn legs out from base 0.5 inches

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.



⁺ Supply Injection

^{*} Wireless Network Board Factory Installed