

MULTI-LOAD DRYERS

TRADITIONAL LINE – OPL: 50 LB AND 75 LB



MICROPROCESSOR CONTROLS*

- Gives end users the option to select the ideal cycle for individual wash and drying needs
- Easy-to-read diagnostics help to quickly identify an issue, locate it, and get the machine back into service



RADIAL AIRFLOW SYSTEM

- Provides fast moisture removal to help dry large loads and bulky items
- High BTU burner and airflow



PROGRAMMABLE ANTI-WRINKLE FEATURE

- The Wrinkle Guard feature helps reduce wrinkles



BUILT TO LAST

- Heavy Duty Motor – designed to handle extra-large loads with ease
- Sealed Bearings – designed to provide an extra layer of protection and minimize friction

*Exception: MDG75MNWWW offers Mechanical Controls with easy-to-use knobs



NON VENT
MDG75PNJVW pictured



NON VENT
MDG75MNWWW pictured

MULTI-LOAD DRYERS – TRADITIONAL LINE		
CAPACITY	MODEL NUMBER	COLOR
50 lb	MDG50PNJWW	White
75 lb	MDG75MNWWW – Mechanical Controls	White
75 lb	MDG75PNJVW – Microprocessor Controls	White



See maytagcommerciallaundry.com for warranty details.

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.

®/™ © 2020 Maytag. All rights reserved.
MY200035 10/22

MULTI-LOAD DRYERS


TRADITIONAL LINE – OPL: 50 LB AND 75 LB



GAS MULTI-LOAD DRYERS

MDG50(PN): 120V/60 HZ/1 Phase
 MDG75(MN): 120V/60 HZ/1 Phase
 MDG75(PN): 240V/60 HZ/3 Phase

BACK VIEW

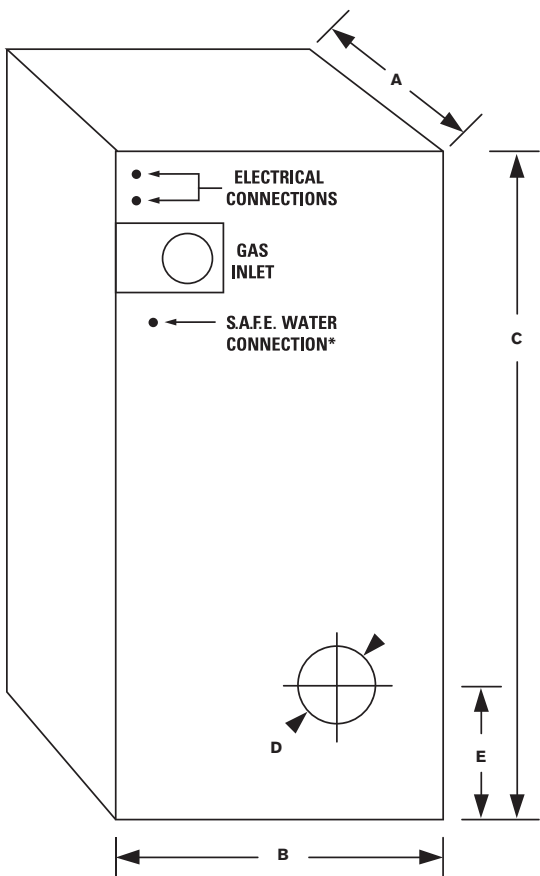

*S.A.F.E. water pressure requires 40 psi ± 20 psi. Requires 1/2" (12.7 mm) water hose connection.

MODEL	MDG50 (PN)	MDG75 (PN)	MDG75 (MN)
CAPACITY			
Number of Dryer Pockets	1	1	1
Cylinder Volume Each Pocket — cu. ft. (liters)	18.30 (518)	22.40 (634)	22.40 (634)
Cylinder Diameter Each Pocket — in. (mm)	32.75 (832)	37 (940)	37 (940)
Cylinder Depth Each Pocket — in. (mm)	37.50 (953)	36 (914)	36 (914)
Dry Load Capacity Each Pocket — lb (kg)	50 (22.7)	75 (34.0)	75 (34.0)
GAS SPECS/AIRFLOW			
Drive Motor Size — hp (kW)	3/4 (.56)	0.5 (.37)	1 (.75)
Blower Motor Size — hp (kW)	-	1 (.75)	-
Airflow Type	Radial	Radial	Radial
Airflow — cfm (cmm)	750 (21.20)	1,000 (28.30)	1,000 (28.30)
Gas Inlet Size — in.	.5 M.N.P.T.	.75 F.N.P.T.	.75 F.N.P.T.
Heat Input, Gas — btu/hr (kcal/hr)	150,000 (37,800)	175,000 (44,100)	175,000 (44,100)
Number of Exhausts	1	1	1
(D) Exhaust Duct Diameter — in. (mm)	8 (203.2)	8 (203.2)	8 (203.2)
ELECTRICAL REQUIREMENTS			
Breaker Fuse - Amps	15	15	20
DIMENSIONS			
(A) Depth — in. (mm)	50.00 (1,270)	48.38 (1,229)	48.38 (1,229)
(B) Width — in. (mm)	34.25 (870)	38.25 (972)	38.25 (972)
(C) Height — in. (mm)	72 (1,829)	75.13 (1,908)	75.13 (1,908)
Door Opening — in. (mm)	21.50 (546)	31.38 (797)	31.38 (797)
(E) Height to Center of Exhaust — in. (mm)	10.5 (267)	18.75 (476)	18.75 (476)
APPROXIMATE WEIGHT			
Uncrated — lb (kg)	651 (295.3)	721 (327)	721 (327)
Crated — lb (kg)	700 (317.5)	771 (349.7)	771 (349.7)
CONTROL/USER INTERFACE			
Control Type	Microprocessor	Microprocessor	Mechanical
Display Type	Digital	Digital	N/A
Vended Controller	No	No	No
OPL Controller	Microprocessor	Microprocessor	Mechanical
CONSTRUCTION			
Cylinder	Galvanized Steel	Galvanized Steel	Galvanized Steel
Top	Painted CRS	Painted CRS	Painted CRS
Front	White	White	White
Sides	Painted CRS	Painted CRS	Painted CRS



Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.